Strait of Canso Pipeline Crossing

STRAIT OF CANSO, NOVA SCOTIA



COMPLETION DATE
July 1999

VALUE OF CONTRACT \$1,600,000.00


OWNER

BBA for Sable Offshore-Energy

Prime Contractor

Venture-Pentzien Burl Joe Wilkerson 902-747-2370



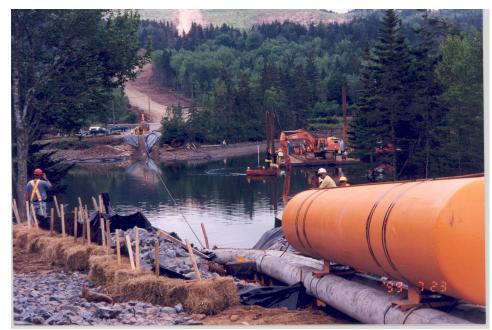



Project Description

DESCRIPTION

To cover approximately 4200 LF of twin 8"dia. gas pipe lines with a layer of intermediate stone and a layer of armour stone in a water depth of 160 ft.

Stone Quantity 110,000 tons. The work involved setting a reliable anchor system in order to spot the dump scows directly over the pipe, dredging at the shore approaches, pull winch lines shore to shore and retrieve buoyancy tanks following the pipe pull.

Scow were loaded at Mulgrave Wharf and towed six miles to site.

EQUIPMENT

Canadian Argosy with 2400B Lima Crane

Tug "Churchill River" (now "Mr. Joe"), Tug "Baie Ste. Anne II", 1000 cy split Dump Scow No. 12, and 700 cy Dump Scow No.2 All Equipment approved to Lloyd's Register